



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION. IT MAY NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR MANUFACTURING OR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN PERMISSION.

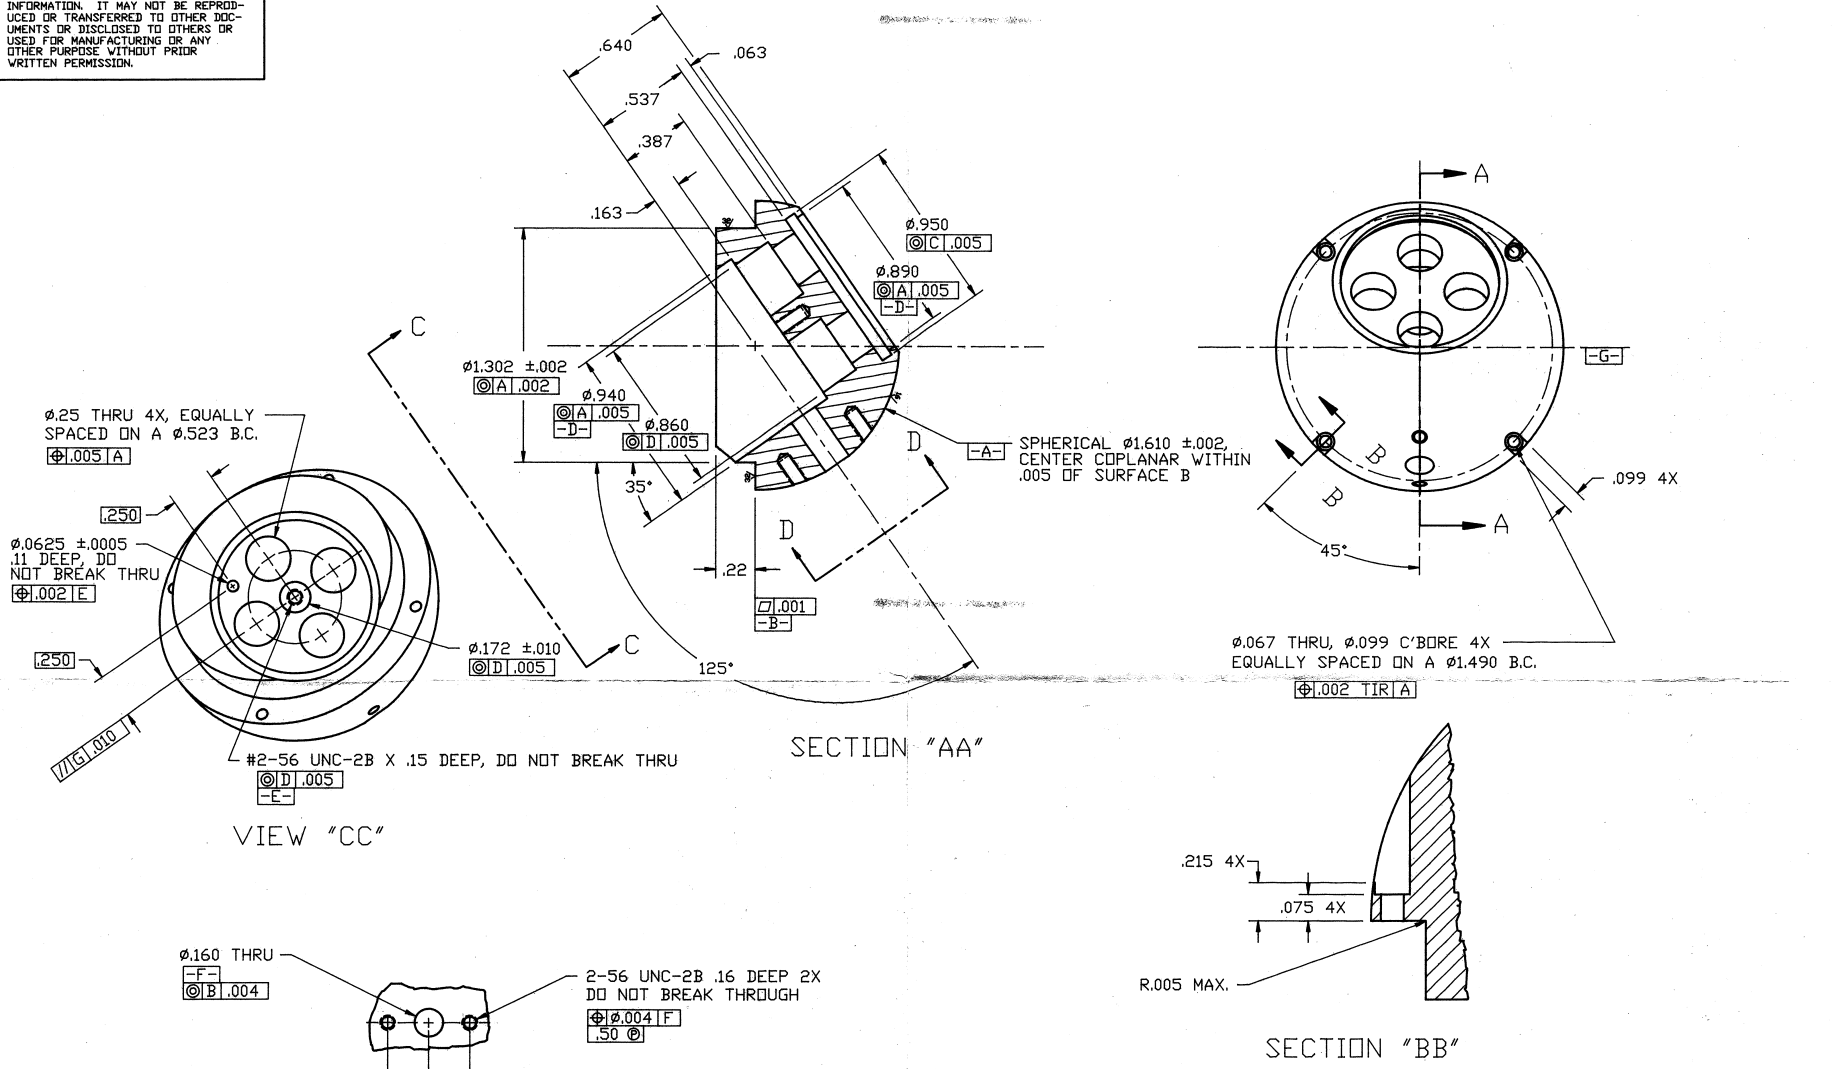

2) TUMBLE BURNISH O.D. TO A HIGH POLISH
 NOTES: 1) TUMBLE DEBURR

UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ANSI Y 14. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING. BREAK SHARP EDGES.		DWN JOHN MAGOLSKE	DATE 3/18/91		
.xx ± .010	x* ± .5*	CHECK	QC		
.xxx ± .005	✓	PRJ ENG		VIS-5000 HEAD CAP, WITH BUTTONS	
MATERIAL AL 6061-T6		NEXT ASSY nnnn-nnnn	USED ON uuuu-uuuu		
FINISH ANODIZE TYPE II, CLASS 2, DYE BLACK .0025 THK. DO NOT ETCH. HIGH LUSTER FINISH REQUIRED ON O.D.		nnnn-nnnn1	uuuu-uuuu1	SIZE C	DRAWING NUMBER 5010-0069-00
		nnnn-nnnn2	uuuu-uuuu2	SCALE 2:1	REV X1
		nnnn-nnnn3	uuuu-uuuu3	ECD NUMBER	SHEET 1 OF 1